

Removing the Hard Disk Drive

The hard disk drive is mounted in a removable case and can be taken out to accommodate other 2.5" SATA hard disk drives with a height of 9.5mm or 7mm (h). Follow your operating system's installation instructions, and install all necessary drivers and utilities (as outlined in **Chapter 4 of the User's Manual**) when setting up a new hard disk.

Hard Disk Upgrade Process


1. Turn off the computer, and turn it over and remove the battery ([page 2 - 5](#)).
2. Locate the hard disk bay cover and remove screws **1** - **4**.
3. Lift and pull the bay cover in the direction of the arrow **5** and **6**.
4. Remove the bay cover **7**.

- a. Remove the screws.
- b. Lift and pull the bay cover.
- c. Remove the cover.



a.



b.

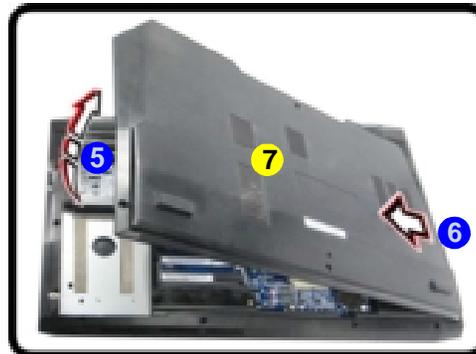

c.

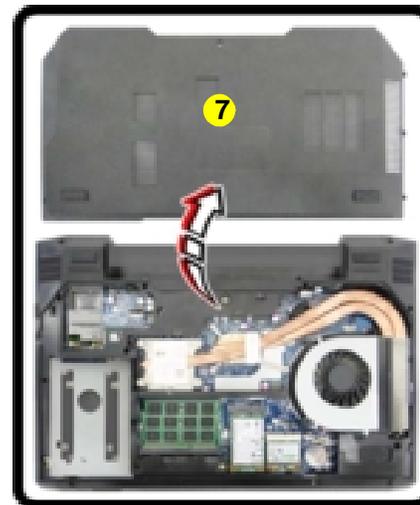

Removing the 3G Module

1. Turn off the computer, turn it over and remove the battery ([page 2 - 5](#)), and component bay cover ([page 2 - 7](#)).
2. The 3G module will be visible at point **1** on the mainboard ([Figure 11a](#)).
3. Carefully remove the screw **2** and disconnect cables **3** & **4** ([Figure 11b](#)).
4. The 3G module **5** ([Figure 11c](#)) will pop-up, and you can remove it from the computer ([Figure 11 d](#)).


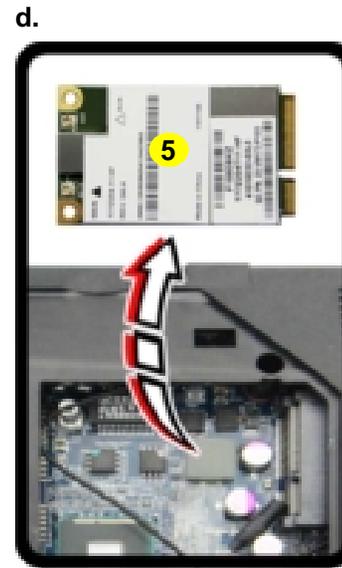


Figure 11
3G Module Removal

- a. Locate the 3G module.
- b. Remove the screw and disconnect the cables.
- c. The module will pop-up.
- d. Remove the 3G module.

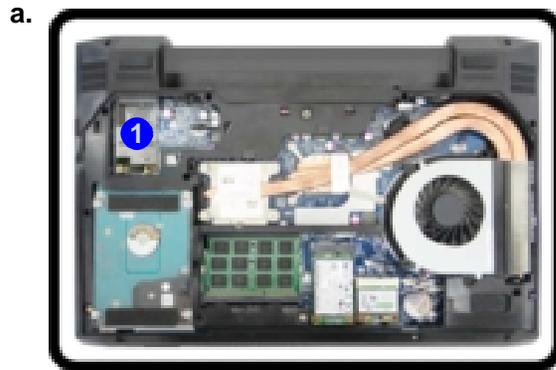

5. 3G Module

- 1 Screw

Removing the mSATA Module

1. Turn off the computer, turn it over and remove the battery ([page 2 - 5](#)), and component bay cover ([page 2 - 7](#)).
2. The mSATA module will be visible at point **1** on the mainboard ([Figure 13a](#)).
3. Carefully remove the screw **2** ([Figure 13b](#)).
4. The mSATA module **3** ([Figure 13c](#)) will pop-up, and you can remove it from the computer ([Figure 13d](#)).

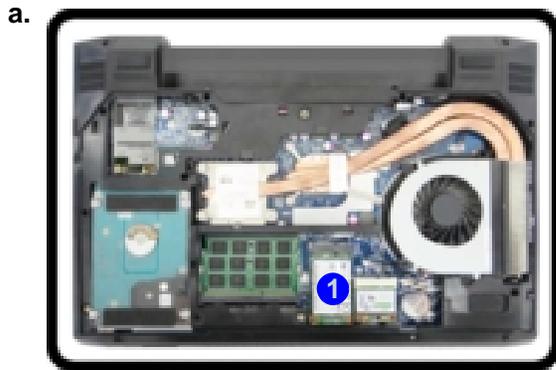


Figure 13
mSATA Module Removal

- a. Locate the mSATA module.
- b. Remove the screw.
- c. The module will pop-up.
- d. Remove the mSATA module.



4. mSATA Module

- 1 Screw